




Метчици машинни, DIN 5156, HSS, тръбна цилиндрична G резба

Тръбна резба G

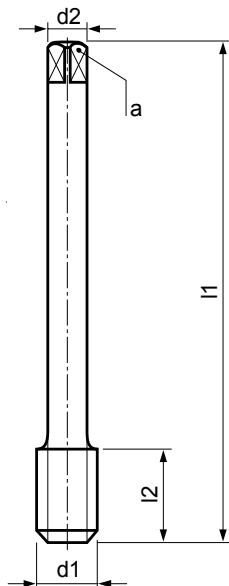

| D | P | l ₁ | l ₂ | d ₂ | a | препоръчителен размер на свредлото, mm |
|--------|----|----------------|----------------|----------------|------|--|
| inch | mm | mm | mm | mm | mm | |
| G 1/8" | 28 | 90 | 20 | 7 | 5,5 | Ø 8,8 |
| G 1/4" | 19 | 100 | 22 | 11 | 9 | Ø 11,8 |
| G 3/8" | 19 | 100 | 22 | 12 | 9 | Ø 15,25 |
| G 1/2" | 14 | 125 | 25 | 16 | 12 | Ø 19,0 |
| G 5/8" | 14 | 125 | 25 | 18 | 14,5 | Ø 21,0 |
| G 3/4" | 14 | 140 | 28 | 20 | 16 | Ø 24,5 |
| G 7/8" | 14 | 150 | 28 | 22 | 18 | Ø 28,25 mm |
| G 1" | 11 | 160 | 30 | 25 | 20 | Ø 30,75 mm |