




Свредла спирални с конусна опашка, DIN 345, HSS, нормални

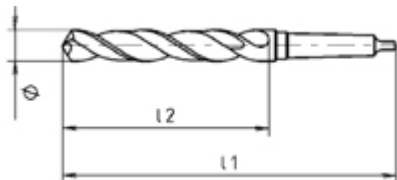

Габаритни размери в
мм

Ø	l1	l2	МК	Ø	l1	l2	МК	Ø	l1	l2	МК
10,00	168	87	1	18,75	233	135	2	27,50	291	170	3
10,20				19,00				27,75			
10,50				19,25				28,00			
10,80	175	94	1	19,50	238	140	2	28,25	296	175	3
11,00				19,75				28,50			
11,20				20,00				28,75			
11,50				20,25				29,00			
11,80	182	101	1	20,50	243	145	2	29,25	301	180	3
12,00				20,75				29,50			
12,20				21,00				29,75			
12,50				21,25				30,00			
12,80				21,50				30,25			
13,00				21,75				30,50			
13,20	189	108	1	22,00	248	150	2	30,75	306	185	3
13,50				22,25				31,00			
13,80				22,50				31,25			
14,00				22,75				31,50			
14,25	212	114	1	23,00	276	155	2	31,75	334	190	4
14,50				23,25				32,00			
14,75				23,50				32,50			
15,00				23,75				33,00			
15,25	218	120	2	24,00	281	160	3	33,50	339	195	4
15,50				24,25				34,00			
15,75				24,50				34,50			
16,00				24,75				35,00			
16,25	223	125	1	25,00	286	165	2	35,50	344	195	3
16,50				25,25				36,00			
16,75				25,50				36,50			
17,00				25,75				37,00			
17,25	228	130	1	26,00				37,50			

17,50			26,25			38,00			
17,75			26,50			38,50			
18,00			26,75			39,00	349	200	
18,25	233	135	27,00	291	170	39,50			
18,50			27,25			40,00			